


**PLF-286**

**HIGH ATTENUATION POWER ENTRY MODULE**

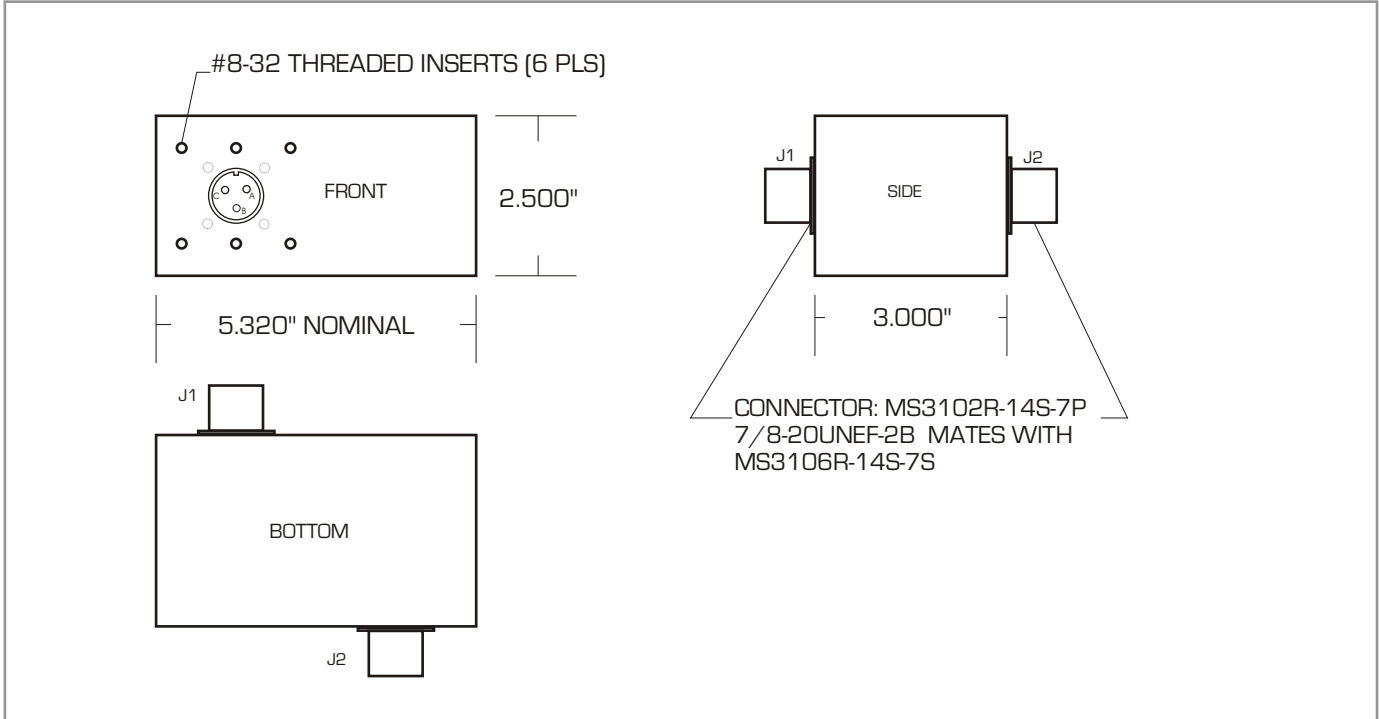

OUTLINE DRAWING

**EMICON P/N:** PLF-286

Line Voltage: 110/220 VAC


Line Frequency: 50/60 Hz

Line Current: 15 Amps Max

Leakage Current: 4 mA @ 110 V<sub>AC</sub>  
8mA @ 220 V<sub>AC</sub>

FREQUENCY	ATTENUATION	
	SINGLE ENDED	COMMON MODE
50 KHz	30 dB	25 dB
100 KHz	80 dB	70 dB
150 KHz	100 dB	90 dB
200 KHz -1GHz	125 dB	125 dB

SPECIFICATIONS

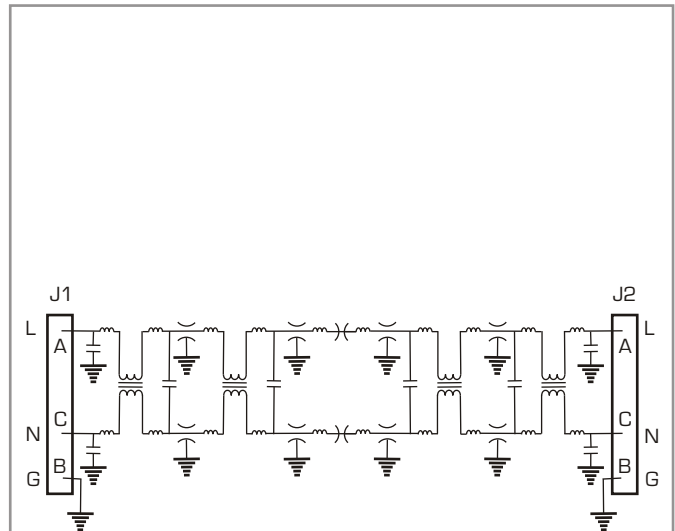

FUNCTIONAL DIAGRAM